

# Series DPR

# Recessed Parabolic

## Application

Mid level, specification grade, recessed, high performance, lay-in deep cell parabolic T-Bar troffer designed for maximum efficiency and visual comfort. Available in 2'x2', 2'x4', and 1'x4' configurations. Accommodates mounting into low ceiling plenums. Static fixtures are standard: air supply and heat removal functions are available as options.

## Features

- Louver manufactured from low ridescant semi-specular anodized aluminum.
- Shallow design.
- Black reveal provides gap free floating louver appearance. Hinges from either side.
- Die formed steel T-Hinges. Access plate for quick wiring.
- Positive locking cam action latches.
- Air functions - choice of static, air supply or heat removal
- Optional louver finishes in gold and white.
- Various cell configurations available
- Integral earthquake clips
- UL labeled for damp location



Fluorescent Lighting


## Construction

Die formed, code gauge painted white cold rolled steel housing. Die formed, cold rolled steel reveal. Precision formed, anodized semi-specular aluminum louver. Standard nominal 3" deep cell louvers are 2 13/16" deep and are manufactured using interlocked construction and mitred corners. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. A protective film or bag is provided to protect the louver and fixture from construction dust. Louver hinges from either side using die formed steel T-hinges. Latches use a positive locking cam action and come with matching finish.

## Ordering Information

Series	Dimensions	LampQty.	Lamp Wattage	Voltage	Cell Configuration	Ballast Options	Dimming Options	Lamp Options
DPR	14=1x4	2	17	120	(1x4)	BB=Battery Backup	AD7=Advance	LI30=3000k
	22=2x2	3	28	277	8-1x8	(1 lamp 500 lumens)	Mark 7	LI35=3500k
	24=2x4	4	32	UNV	16=2x8	DS=Dual Switching	AD10=Advance	LI41=4100k
			32U (2x2)	(120-277)	(2x2)		Mark10	LI50=5000k
			32		9=3x3		LDE=Lutron	
			FP21		12=3x4		Eco10	
			FP28		16=4x4		LDH=Lutron	
			FP23		(2X4)		Hi-Lume	
			FP54		18=3X6			
					24=3X8			
				24/4=4X6				
				32=4X8				

## Dimensions

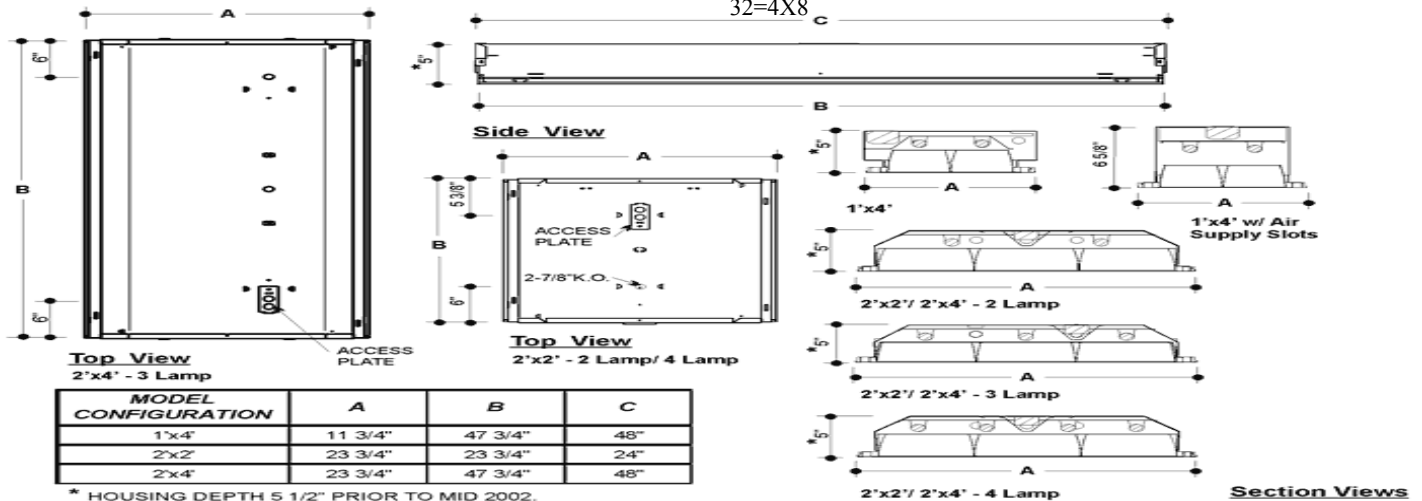

300-308 Vine Street, NW, Washington, DC 20012  
 Office: (202) 882-5181  
 Fax: (202) 882-5182

Type:  
 Cat. #:  
 Project: