

Series CHST


T8 Staggered Channel

Application

Staggered channel. Suitable for indoor use such as coves, display areas and areas requiring uniform row lighting with no shadowing between fixtures.

Features

- For row mounting. Overlaps lamps to prevent "socket end" dark spots.
- Ideal for coves, valances and indirect lighting.
- Available with 1 or 2 lamps.

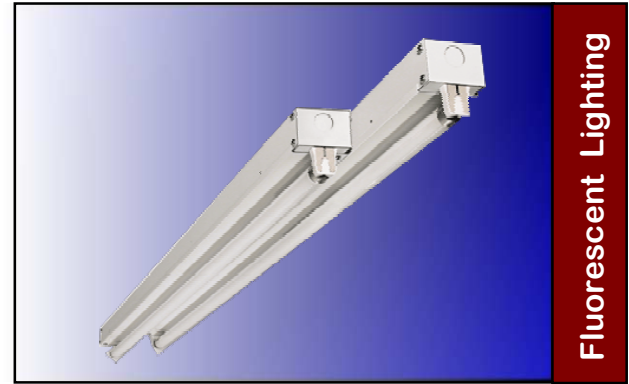

Fluorescent Lighting


Construction

Die-formed housing is made from cold rolled steel. Standard finish is baked on high reflectance enamel. End knock-outs are provided for conduit attachment. Stem mounting knock-outs are provided on top of fixture. Pre-drilled holes are provided for installation. Lamp holders provided ensure positive lamp retention. Lamp holders with rotary locks are available.

Ordering Information

Series	Lamp Qty.	Lamp Wattage	Voltage	Ballast Options	Dimming Options	Lamp Options
CHST	1	17	120	BB=Battery Backup	AD7=Advance	LI30=3000k
	2	25	277	(1 Lamp 500 Lum)	Mark 7	LI35=3500k
		32	UNV		AD10=Advance	LI41=4100k
					Mark 10	LI50=5000k
					LDE=Lutron	
					Eco10	
					LDH=Lutron	
					Hi-Lume	

Dimensions

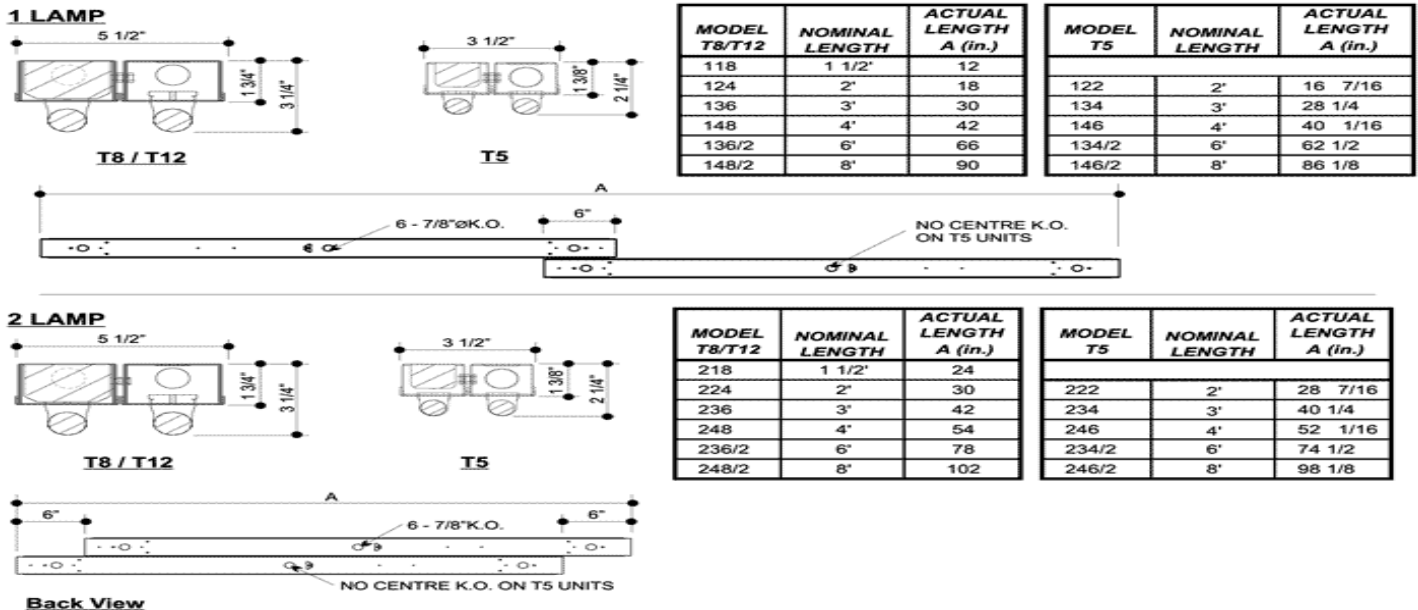

300-308 Vine Street, NW, Washington, DC
 20012 Office: (202) 882-5181
 Fax: (202) 882-5182

Type: _____
 Cat.#: _____
 Project: _____