


Series CHSTT5

Staggered T5 Strip

Fluorescent Lighting

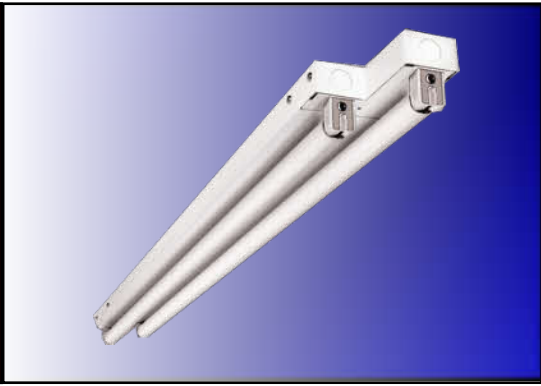

Application

Mid Grade, fluorescent strip fixture. Uses high efficiency fluorescent T5 technology. For use in indoor applications, such as coves, where continuous uniform row lighting without "socket end" dark spots is desired. Ideal for display cabinets and store lighting where compact design and high performance is required. Available in nominal lengths from 2' to 8'.

Features

- Advanced high efficiency T5 technology.
- For row mounting. Overlaps lamps to prevent "socket end" dark spots.
- Very narrow profile, only 2 1/2" wide.
- Ideal for coves, valances and indirect lighting.
- Available with 1 or 2 lamps.
- Steel housing and ends with white enamel finish.
- Heavy duty construction.

Construction


Die and brake formed, heavy gauge pre-painted white cold rolled steel. Single wireway cover on non-tandem units. End caps may be butted together for continuous row mounting. Knockouts are provided on ends for through wiring. All electrical components are UL approved. Lamp holders ensure positive lamp retention. Standard ballasts are electronic rapid start for T5 lamp configurations. The standard voltage is multi-volt. Sufficient knockouts are provided on the back and ends for connections and through wiring.

Ordering Information


Series	Lamp Qty.	Lamp Wattage	Voltage	Ballast Options	Dimming Options	Lamp Options
CHSTT5	1	FP14	120	BB=Battery Backup	AD7=Advance	LI30=3000k
		FP21	277	BB=Battery Backup	Mark 7	LI35=3500k
	2	FP28	UNV	(1 Lamp 500 Lum)	AD10=Advance	LI41=4100k
		FP35			Mark10	
		FP24	LDE=Lutron			
		FP39	Eco10			
		FP54	LDH=Lutron			
		FP80	Hi-Lume			

Dimensions

1 LAMP




Cross Section

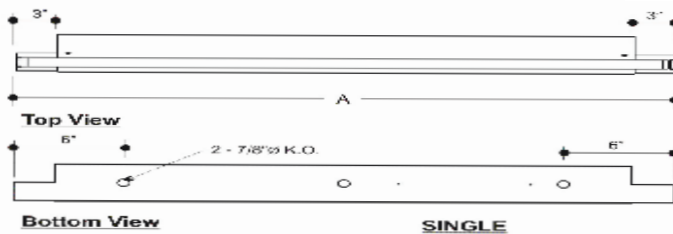

Bottom View

SINGLE

MODEL	NOMINAL LENGTH	ACTUAL LENGTH A (in.)
122	2'	22 7/16
134	3'	34 1/4
146	4'	46 1/16
158	5'	57 7/8
134/2	6'	65 1/2
146/2	8'	89 1/8




Top View

TANDEM

134/2
146/2

2 LAMP

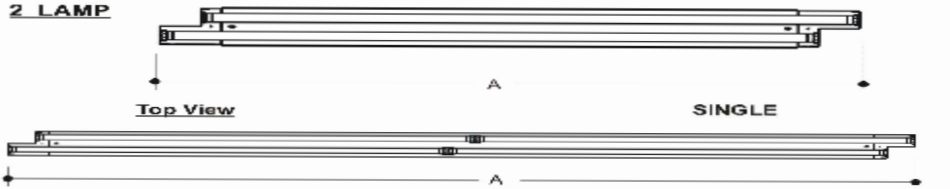

Top View

SINGLE

TANDEM

234/2
246/2

MODEL	NOMINAL LENGTH	ACTUAL LENGTH A (in.)
222	2'	25 7/16
234	3'	37 1/4
246	4'	49 1/16
258	5'	60 7/8
234/2	6'	71 1/2
246/2	8'	95 1/8



Type:
Cat. #:
Project: