

Features

- 2' and 4'
- Vandal Resistant
- Shallow design.
- Heavy duty construction.
- Injection moulded polycarbonate prismatic diffuser.
- Stainless steel hardware.
- Available with 1 or 2 lamps.

Construction

Die and brake formed, 16 gauge cold rolled steel housing. Diffuser is held in place and is secured with stainless steel screws. Powder painted high reflectance white housing. Mounts over electrical junction box. Mounting holes are provided. All electrical components are CSA or UL approved. Ballasts and lamp holders are replaceable without removing the luminaire from the mounting surface. Lamp holders with rotary locks are available. Electronic ballast is standard. See Product Selection for optional ballasts. The standard voltage is 120V, 60 Hz, or as specified. Other Voltage and frequency ratings are also available. Sufficient knockouts are provided on the back for electrical feed connection.


Optics

Injection moulded, thick walled, clear prismatic diffuser is manufactured from high impact, U.V. treated polycarbonate

Ordering Information

Series	Lamp Qty.	Lamp Wattage	Voltage	Ballast Options	Lamp Options
ZA	1	17	120	BB=Battery Backup	LI30=3000k
	2	28	277		LI35=3500k
	3	32	UNV		LI41=4100k
		FP14			LI50=5000k
		FP28			
		FP24			
		FP54			

Dimensions

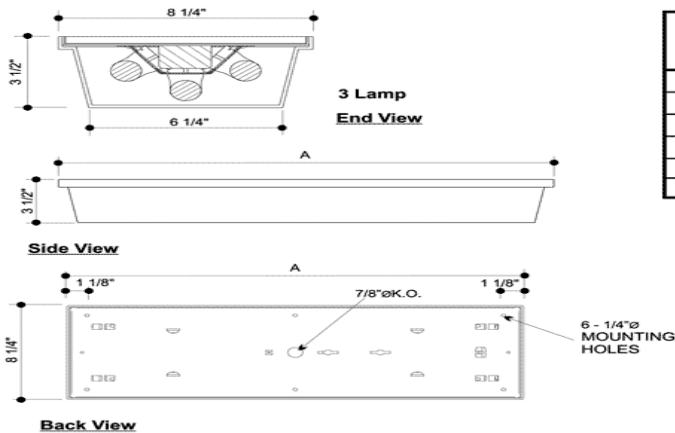

MODEL	NOMINAL LENGTH	OVERALL LENGTH A (in.)
124	24"	26 3/16"
224		
324		
148	48"	50 3/16"
248		
348		



300-308 Vine Street, NW, Washington, DC
 20012 Office: (202) 882-5181
 Fax: (202) 882-5182

Type: _____
 Cat.#: _____
 Project: _____