


Decorative Emergency

Series R2

Features:

Compact economical unit, installs easy and has a low profile appearance.

Completely self-contained. Fully automatic operation.

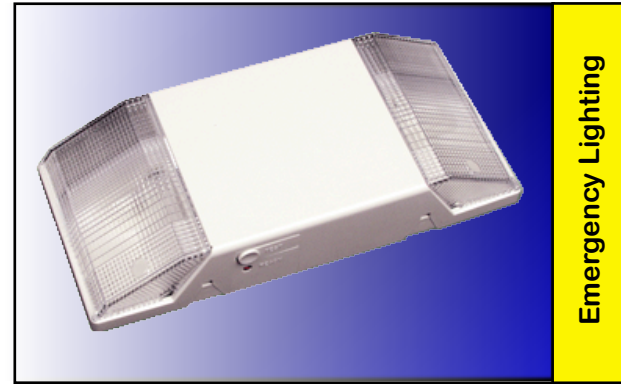



Specifications:

- Completely self-contained.
- Fully automatic operation.
- Compact, low profile design in a neutral finish.
- Push to test switch.
- 6-Volt premium grade, pure lead, maintenance-free battery with 10-year expected life.
- Environmentally-coated, solid state charger.
- Automatic, low voltage disconnect (LVD).
- Universal transformer for 120 or 277 VAC.
- Injection molded, V-O flame retardant, high impact, thermoplastic housing.
- Charge rate/power on LED indicator light.
- Listed for damp locations.

Ordering Information:

Series	Color	Power Cord	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage	Damp Location
R2	B = Black Blank = White	C = Cord	90 min.	120v/277v	2x5.4w	6 Volt	Yes

Example: XT-B-C (Black Unit w/ Cord)

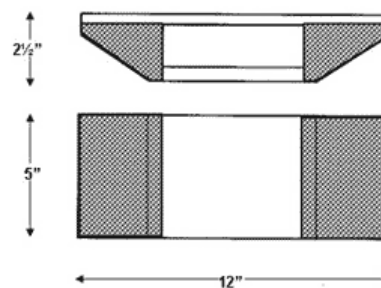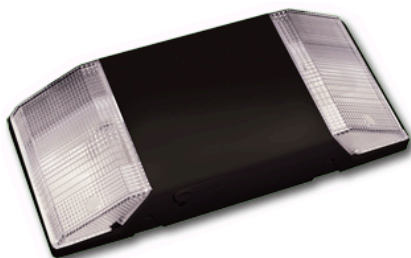

Type:
Cat.#:
Project: